

# Information extraction using user Feedback technique

D.Saravanan

Faculty of Operations & IT

ICFAI Business School (IBS), Hyderabad,

The ICFAI Foundation for Higher Education (IFHE)

(Deemed to be university u/s 3 of the UGC Act 1956)

Hyderabad-India.

**Abstract**—Target search in content-based image retrieval systems refers to finding a specific (target) image such as a particular registered logo or a specific historical photograph. Existing techniques, designed around query refinement based on relevance feedback suffer from slow convergence, and do not guarantee to find intended targets. To address these limitations, here to propose a new index structure and query processing technique to improve retrieval effectiveness and efficiency and also considered strategies to minimize the effects of users' inaccurate RF. Extensive experiments in simulated and realistic environments show that the approach significantly reduces the number of required iterations and improves overall retrieval performance. The experimental results also confirm that the approach can always retrieve intended targets even with poor selection of initial query points.

**Key Terms:** Data mining, Content Based Image Retrieval, Relevance feedback, Index structures.

## 1. INTRODUCTION

Data mining which is defined as the process of extracting previously unknown knowledge, and detecting interesting patterns from a massive set of data, has been a very active research. As results, several commercial products and research prototypes are even available nowadays. An example of image data mining is CONQUEST [1] system that combines satellite data with geophysical data with geophysical data to discover patterns in global climate change. The SKICAT system [2] integrates techniques of image processing and data classification in order to identify 'sky object' capture in a very large satellite picture set. The MULTIMEDIMINER [3] work has construct many image understanding, indexing and mining technique in digital media. Content-base video analyzing and retrieval are important technologies, which have been an international research focus in recent ten years. As challenging problem, content-based mining is also emphasized by lots of researchers. The mining of video data based on its content is still in its infancy.

Many CBIR system have been developed:QBIC[4],Phtobook[5],MARS[6], PicHunter [7], [8],Blowworld[9], and others [10],[11],[12].In CBIR system, low-level visual image features(e.g., color, texture and Shape) In a

typical CBIR system, low-level visual image features (e.g., color, texture, and shape) are automatically extracted for image descriptions and indexing purposes. To search for desirable images, a user presents an image as an example of similarity, and the system returns a set of similar images based on the extracted features. In CBIR systems with relevance feedback (RF), a user can mark returned images as positive or negative, which are the n fed back into the systems as a new, refined query for the next round of retrieval. The process is repeated until the user is satisfied with the query result.

## II. RELATED WORK

There are two general types of image search: target search and category search [13], [14]. The goal of target search is to find a specific (target) image, such as a registered logo, a historical photograph, or a particular painting. The goal of category search is to retrieve a given semantic class or genre of images, such as scenery images or skyscrapers. In other words, a user uses target search to find a known image. In contrast, category search is used to find relevant images the user might not be aware ahead of time. Their retrieval accuracy, however, depends on the effectiveness of the visual features used to characterize the database images. An effective CBIR system, therefore, needs to have both an efficient search mechanism and an accurate set of visual features their retrieval accuracy, however, depends

on the effectiveness of the visual features used to characterize the database images. An effective CBIR system, therefore, needs to have both an efficient search mechanism and an accurate set of visual features. Existing target search techniques re-retrieve previously examined images (i.e., those retrieved in the previous iterations) when they again fall within the search range of the current iteration. This strategy leads to the following disadvantages:

No guarantee that the target can be found. The search operation generally takes several iterations of RF to examine a number of regions in the feature space, before it reaches the target image. During this iterative process, the search advancement might get trapped in a region as illustrated in Fig. 1. Slow convergence. Including previously examined images in the computation of the current centroid results in repeat retrieval of some of the images. This prevents a more aggressive movement of the search in the feature space.

Video editing is the process of selecting and joining various shots to create a final video sequence. A shot is defined as one exclusive stream of video frames recorded by a single camera. In video editing, there can be numerous ways to make the transition from one shot to another so that the quality of the created video depends on the user's skill. So, discovering the useful editing patterns from a video called "Video data mining". Advance in multimedia technology have yielded a video achieve, where a large amount and various kind of videos are stored. So, a user often spend a long time to find videos of his/her interest. In order of retrieve various kinds of events from a video achieve, we first conduct Video data mining to extract patterns from video.

### III. IMAGE MINING

There are two major issues that will affect the image data mining process. One is the notion of similarity matching and the other is the generality of the application area. For a specific application area, associated domain knowledge can be used to improve the data mining task. Since data mining relies on the underlying querying capability of the CBIR system, which is based on similarity matching, user interaction will be necessary to refine the data mining process. With image mining we will consider the four broad problem areas associated with data mining: Finding associations, Classification, Sequential pattern and Time series pattern. With all these, the essential component in

image mining is identifying similar objects in different images

#### A. Image Mining Algorithm Steps

The algorithms needed to perform the mining of associations within the context of image. The four major image mining steps are as follows:

1. Feature Extracting: Segment images into regions identifiable by region descriptors (blobs) ideally one blob represents one object.
2. Object identification and record creation: Compare objects in one image to objects in every other image. Label each object with an id. We call this step the preprocessing algorithm.
3. Create auxiliary images: Generate image with identified objects to interpret the association rules.
4. Apply data mining algorithm to produce object.

#### B. Content-Based Image Retrieval

Content-Based Image Retrieval (CBIR), also known as Query by Image Content (QBIC) and Content-Based Visual Information Retrieval (CBVIR) is the application of computer vision to image retrieval problem, that is, the problem of searching for digital images in large database. "Content-based" means that the search will analyze the actual contents of the image[15]. The term 'content' in this context might refer to colors, shapes, textures, or any other information that can be derived from the image itself. Without the ability to examine image content, searches must rely on metadata such as captions or keywords, which may be laborious or expensive to produce. Retrieving images based on color similarity is achieved by computing a color histogram for each image that identifies the proportion of pixels within an image holding specific values that humans express as colors.

Current research is attempting to segment color proportion by region and by spatial relationship among several color regions. Examining images based on the colors they contain is one of the most widely used techniques because it does not depend on image size or orientation. Color searches will usually involve comparing colour histogram though this is not the only technique in practice. But this image search result may contains relevant data and nor relevant data, Because if we give black building, it may show some other black objects, so each and every image have some concept we can retrieve relevant this images based on this concepts. For inter

relate this concepts using relevance feed back given by user .so if we get this feature and normal CBIR, this concept will display effective results.

**IV PROPOSED SYSTEM**

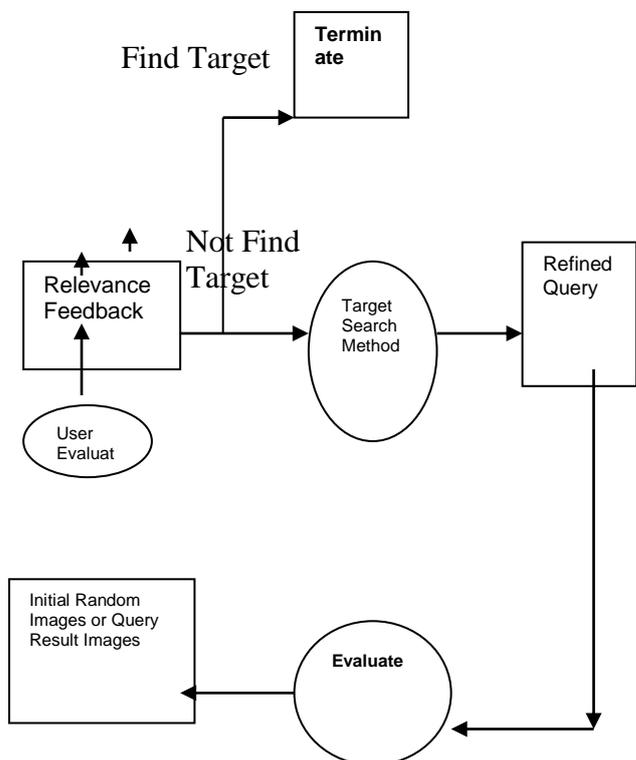


Fig 1: Overview of the Search System

CBIR (Content Based Image retrieval) System modern image databases are queried by image content. Relevance feedback is an interactive process, which fulfils the requirements of the query formulation.

The user initializes a query session by submitting an image.

The system then compares the query image to each image in the database and returns the images that are the nearest neighbors to the query.If the user is not satisfied with the retrieved result, the user can activate an RF process by identifying which retrieved images are relevant and which are non relevant.

Based on the retrieved result users can give notification to the system which is relevant and which is non relevant this will store in virtual feature

Virtual feature can adapt that reference with that image category for future effective retrieval with indexing technique we can retrieve images with different concept.

**A. Advantages of Proposed System:**

1. User Feedback is included.
2. Reduces the unrelated searches
3. The images are searched using the image properties
4. Single Image can have multiple concepts

**V. EXPERIMENTS**

In this section we present experimental results in realistic environments, and evaluate the effectiveness of the query processing technique. In the experiments that produced the number of iterations, we had to make sure that the compared techniques could successfully reach the intened targets.

**VI CONCLUSION**

This paper attempts to give a clear concept for CBIR the feasible approaches and possible applications of CBIR are discussed as well. The main advantage of the proposed method is the possibility of retrieval using high lever image semantic feature. Experiments with our prototype show that our approach can achieve fast convergence even in the realistic environments, and in very promising for large CBIR systems.

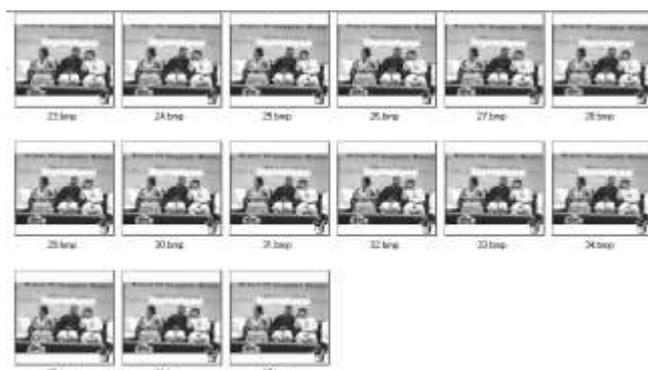


Fig 2: Frame Conversion Debate video

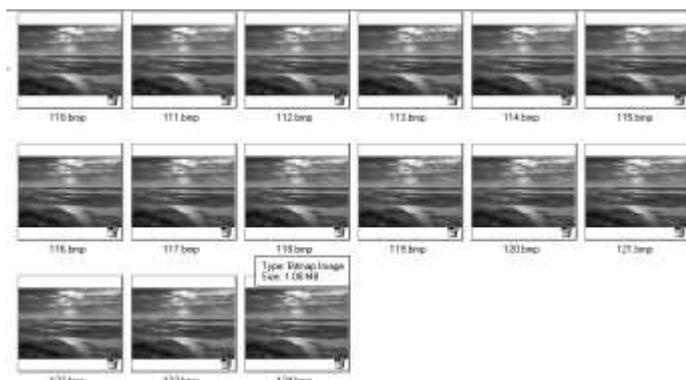


Fig 3: Frame Conversion Globe video



Fig 4: View Image



Fig 5: Upload Image

Tab 1: Duplication Elimination process

Video name	Number of Input frames	Number of output frames	Duplicate frames removed
Cartoon	7	6	1
Graphics	16	10	6
Meeting	15	14	1
Natural Scene	15	13	2
Song	15	14	1

frame	value
D:\Video1\Video Frame Comparison Using CURE Algorithm\bin\Frames \145. bmp	17320874
D:\Video1\Video Frame Comparison Using CURE Algorithm\bin\Frames \146. bmp	17964267
D:\Video1\Video Frame Comparison Using CURE Algorithm\bin\Frames \147. bmp	18608012
D:\Video1\Video Frame Comparison Using CURE Algorithm\bin\Frames \148. bmp	19007717
D:\Video1\Video Frame Comparison Using CURE Algorithm\bin\Frames \149. bmp	19422327
D:\Video1\Video Frame Comparison Using CURE Algorithm\bin\Frames \150. bmp	19898512
D:\Video1\Video Frame Comparison Using CURE Algorithm\bin\Frames \151. bmp	20300463
D:\Video1\Video Frame Comparison Using CURE Algorithm\bin\Frames \152. bmp	20552418
D:\Video1\Video Frame Comparison Using CURE Algorithm\bin\Frames \153. bmp	21017728
D:\Video1\Video Frame Comparison Using CURE Algorithm\bin\Frames \154. bmp	21313259
D:\Video1\Video Frame Comparison Using CURE Algorithm\bin\Frames \155. bmp	21753461
D:\Video1\Video Frame Comparison Using CURE Algorithm\bin\Frames \156. bmp	22026854
D:\Video1\Video Frame Comparison Using CURE Algorithm\bin\Frames \157. bmp	22240212
D:\Video1\Video Frame Comparison Using CURE Algorithm\bin\Frames \158. bmp	22205344
D:\Video1\Video Frame Comparison Using CURE Algorithm\bin\Frames \159. bmp	22329771
	0

Fig 6 Duplicate removal histogram calculation

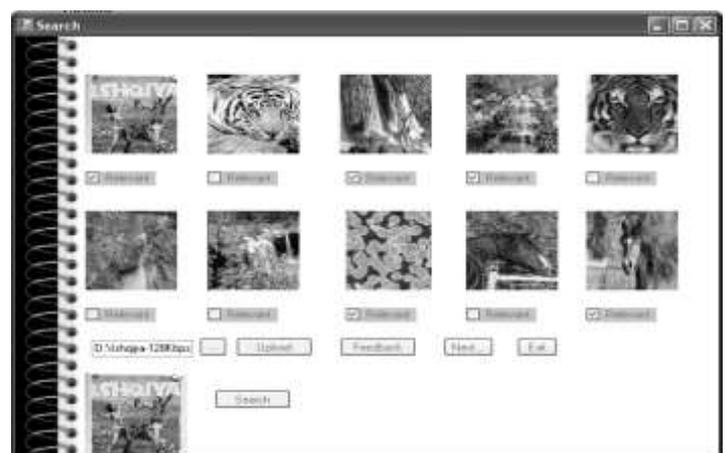


Fig7: Search Image

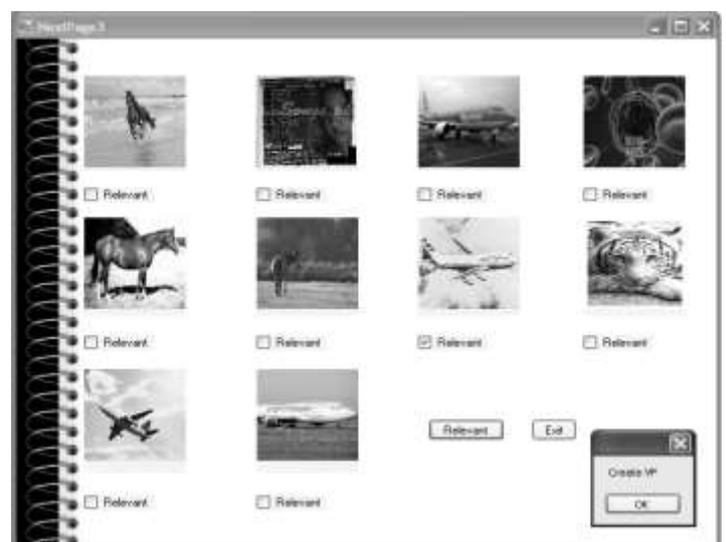


Fig 8: Relevant Image

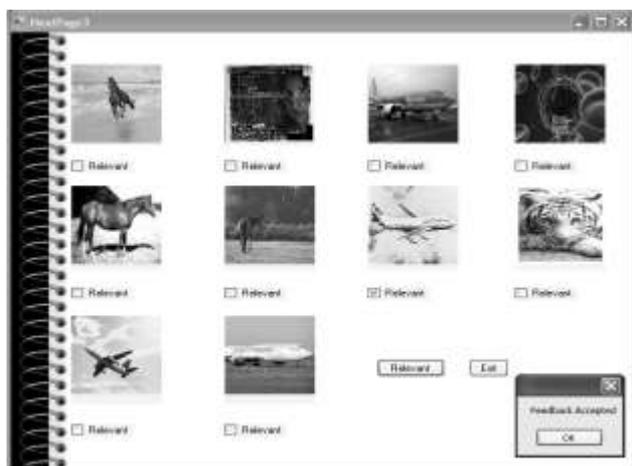


Fig 9: Feed back Image(create VF)

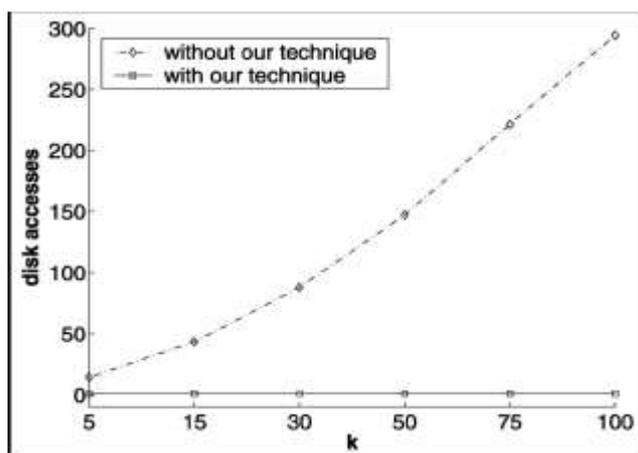


Fig 10: Sampling queries.

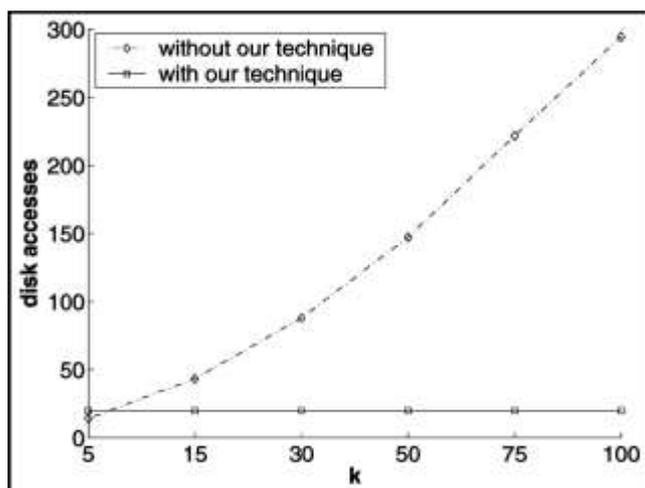


Fig 11: Constrained sampling queries.

## REFERENCES

- [1] P.Stolorz, H.Nakamura, E. Mesrobian, R.Muntz, E.Shek, J.Santos, J Yi, K Ng, S.Chien, C. Mechnoso, and J.Farrar. Fast spatio-temporal data mining of large geophysical database. In Proc. Of Int'l Conf. on KDD , pages 300-305,1995.
- [2.] U.Fayyad, S.Djorgovski, and N.Weir., Automating the analysis and cataloging of sky surveys. Advances in knowledge Discovery with Data Mining, pages 471-493, 1996.
- [3] D.Saravanan, "Video data image retrieval using – BRICH", World journal of Engineering, Vol.14, Issuu 4, Pages 318-323, Aug 2017.
- [4] D.Saravanan," Image frame mining Using indexing technique" Data Engineering and Intelligent Computing , SPRINGER Book series, Chapter 12 , Pages 127-137, ISBN:978-981-10-3223-3,July 2017.
- [5] A. Pentland, R.W. Picard, and S. Sclaroff, "Photobook: Content- Based Manipulation for Image Databases," Int'l J. Computer Vision, vol. 18, no. 3, pp. 233-254, 1996.
- [6] D.Saravanan, "Clustering of video in formations using BRICH Methodology" Pak journal of biotechnology, Vol 14(Special Issue-II-2017), Pages 377-380, Dec- 2017
- [7] W.Y. Ma and B. Manjunath, "Netra: A Toolbox for Navigating Large Image Databases," Proc. IEEE Int'l Conf. Image Processing (ICIP '97), pp. 568-571, 1997.
- [8] D.Saravanan" Effective Video Data Retrieval Using Image Key frame selection", Advances in Intelligent Systems and computing , Pages 145-155,jan-2017.
- [9] D.Saravanan," Effective video Content Retrieval using image attributes", EAI Endorsed Transactions on energy Web and Information Technologies, Vol5, Issues18, e8, Pages 1-5. June 2018.
- [10] I. Bartolini, P. Ciacci, and F. Waas, "Feedbackbypass: A New Approach to Interactive Similarity Query Processing," Proc. 27th Int'l Conf. Very Large Data Base (VLDB '01), pp. 201-210, 2001.
- [11]R. Brunelli and O. Mich, "Image Retrieval by Examples," IEEE Trans. Multimedia, vol. 2, no. 3, pp. 164-171, 2000.

- [12] L. Chen, M.T. Ozsu, and V. Oria, "MINDEX: An Efficient Index Structure for Salient-Object-Based Queries in Video Databases," vol. 10, no. 1, pp. 56-71, 2004.
- [13] D. Saravanan, Dr. Dennis Joseph, "Image data extraction using image similarities", Lecture notes in Electrical engineering, Volume 521, Pages 409-420, ISBN:978-981-13-1905-1, Nov 2018.
- [14] D. Saravanan, "Efficient Video indexing and retrieval using hierarchical clustering techniques", Advances in Intelligence systems and computing, Volume 712, Pages 1-8, ISBN:978-981-10-8227-6, Nov-2018.
- [15] Ying Liu, Dengsheng Zhang, Guojun Lu, Wei-Ying Ma, "A survey of Content-based image retrieval with high-level semantics", The journal of Pattern Recognition Society, Vol 40, pp 262-282, 2007.